


NTAD-TYPE TRITIUM AERODYNAMIC STATIC ELECTRICITY NEUTRALIZER

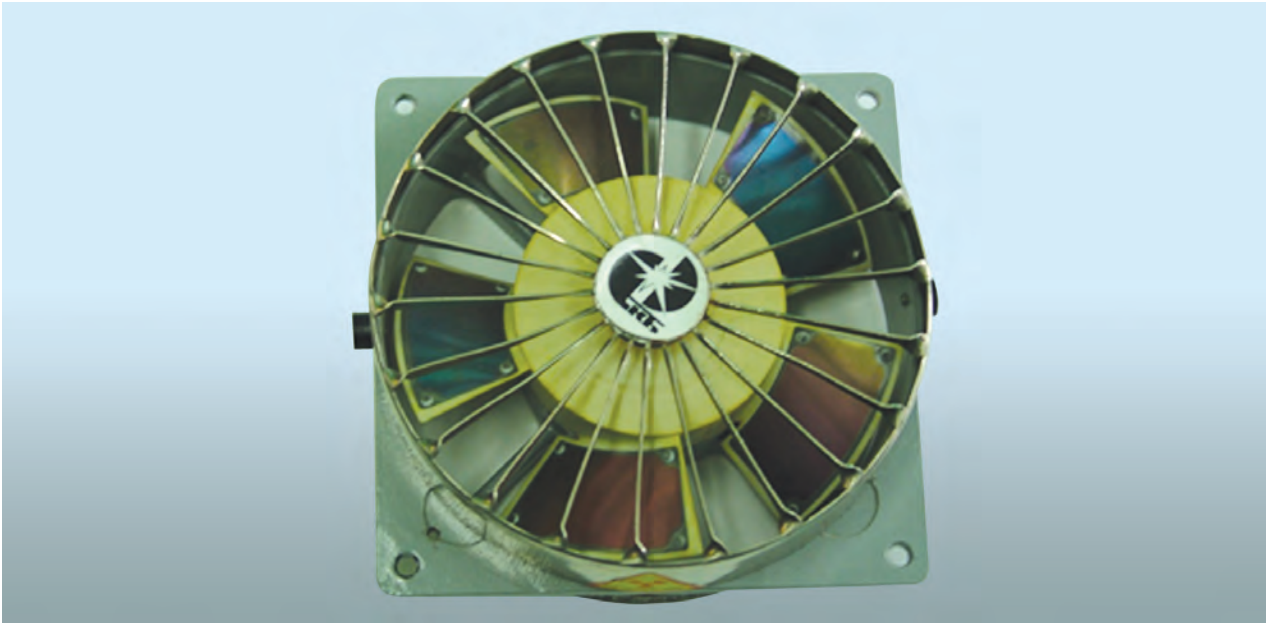

Specification

Output ionization current, mA	≥ 50
Total activity of installed sources, TBq (Ci)	0.296–0.555 (8–15)
Power supply, V	220^{+22}_{-33}
Power consumption, W	≤ 18
Current, mA	≤ 95
Dimensions, mm:	
length	≤ 130
width	≤ 133
height	≤ 50
Weight, kg	≤ 0.75
Service life, years	8

Areas of Application

The aerodynamic neutralizer is designed to remove electrostatic charges from photosensitive materials in the places where passive neutralizers cannot be installed for technical reasons

Stage of Development. Suggestions for Commercialization

IRL6, TRL8
Manufacture, delivery, warranty service, and staff training, upon request

Advantages

The device is high-performance, compact, easy-to-use, and reliable; has a long-term service life and a wide application scope, is cost-effective and environment friendly

IPR Protection

IPR1, IPR2

Contact Information

Oleksandr V. Kovalenko, Institute for Nuclear Research of the NAS of Ukraine;
+38 044 525 26 14, e-mail: akovalenko@kinr.kiev.ua